
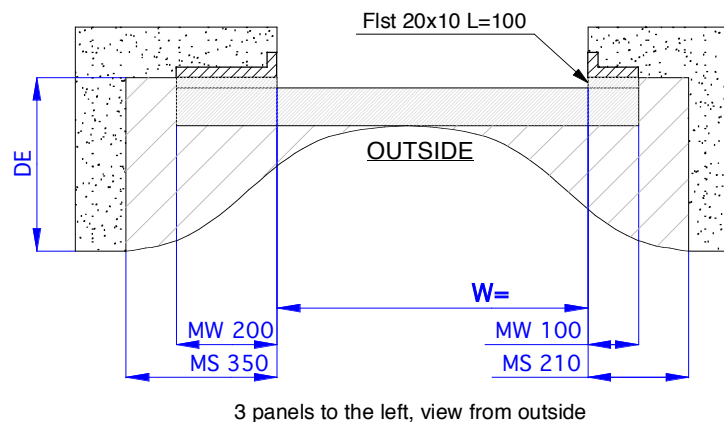



Strike off not wanted panel-grouping alternative.

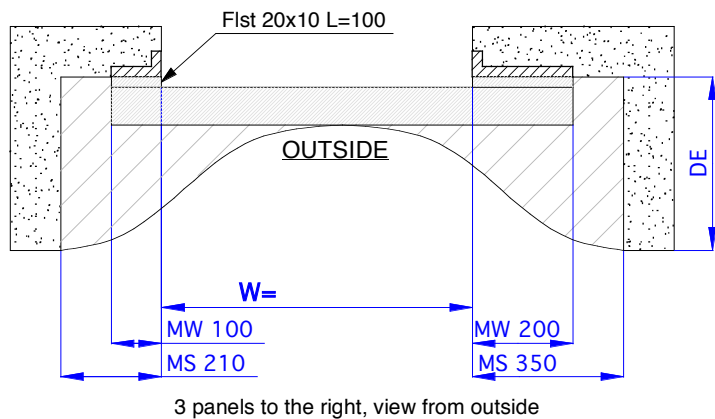

W = Open Width
H = Open Height
MW = Minimum steel Width
MS = Minimum Space

DE=depth of open door = $W/5+200$
 Length of treshold = $W+300$
 Tolerances on dimensions W and H: $\pm 5\text{mm}$
 Frame sides must be vert. and top and sill must be horiz.

 = Door moving area
 Cont. - see **IMPORTANT INFORMATION** sheet 2

Q-DOOR-Original

FRAMEDRAWING

FOR ☐ APPROVAL

☐ KNOWLEDGE

Manual 5-section, inward opening, overlap assembly, sandwich construction, folding doors, type Q-DOOR.

Drawing applies to steel frame for welded installation. (Dimensions in mm.)

To ensure prompt delivery, this drawing must be returned completed and signed to the sales person:

DATE:.....

I hereby certify that the minimum steel section widths and spacings indicated by MW and MS and the stated values of W and H will be observed:

Purchasers approval and signature

Name in block capitals

Company

Telephone-no

Date

TORVERK:s order no:

Item no:

Sellers post date

Sellers sign/code:

(GB) PD QF5OM v6.2

Utf: ms 090417. Godk: TE

R4.4.0-2.1.2.2-#